




CAMAC 2000




CORNER KIT
KIT D'ANGLE







TELESCOPIC EXTENSIONS
RALLONGES TÉLESCOPIQUES

- Always bearing in mind the users' comfort, we have included some important technical improvements such as the level jacks and the new automatic self-levelling system, supplied with the driving group.
- Triangular mast compatible with: EC-1000/150, ECP-1000/150 and EPM-1000/150.
- *Toujours soucieux du confort de l'utilisateur, nous avons mis en place de série d'importantes améliorations techniques, telles que les vérins de nivellement et le nouveau système d'auto-nivellement qui est fourni dans chaque groupe moteur.*
- *Mât triangulaire compatible avec: EC-1000/150, ECP-1000/150 et EPM-1000/150.*

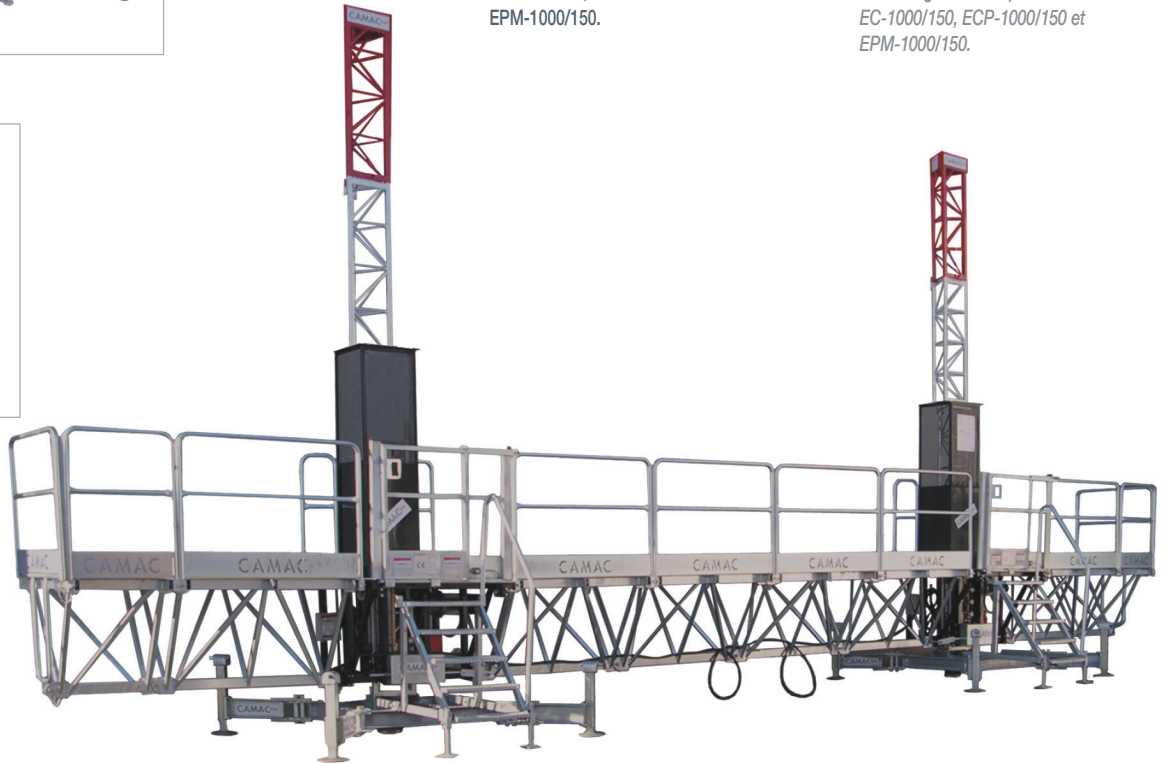

Mechanical centrifugal emergency brake
Frein de secours centrifuge mécanique

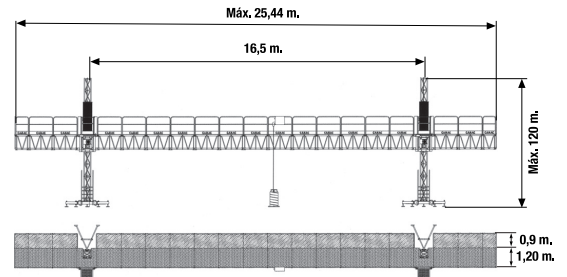

SPECIFICATIONS	CARACTÉRISTIQUES	SINGLE MAST À UNE COLONNE		DOUBLE MAST À DEUX COLONNES	
Altura máxima	Maximun height	m.	120	120	
Distancia entre anclajes	Distance between ties	m.	6	6	
Largo plataforma máximo	Max. platform length	m.	9,04	25,44	
Ancho plataforma	Platform width	m.	1,2 + 0,9	1,2 + 0,9	
Velocidad subida	Climbing speed	m/min.	10	10	
Capacidad carga máxima	Max. loading capacity	Kg.	1.160	2.320	
Potencia del motor	Motor power	Kw.	4,1	4,1 (2 motor/s)	